

Energy saving renovation: analysis of critical factors at the building level

R. Vreenegoor¹, B. de Vries¹ & J. Hensen²

¹*Design and Decision Support Systems,
Department of Architecture, Building and Planning,
Eindhoven University of Technology, The Netherlands*

²*Building Physics and Systems,
Department of Architecture, Building and Planning,
Eindhoven University of Technology, The Netherlands*

Abstract

To accelerate energy saving in the built environment, housing associations should apply low-energy techniques in existing houses that are in need of renovation. Because of a lack of knowledge it is difficult for housing associations to determine which low-energy technique has the best results for energy consumption and CO₂-emissions. In this research a decision support tool will be developed with a new energy performance calculation method at district level including aspects such as houses, transport and households. In this paper we focus on the critical factors at the building level that should be included in a district data model. Therefore we have executed a screening analysis to indicate what these critical factors are.

Keywords: design support, energy performance simulation, screening analysis, building model.

1 Introduction

1.1 We need to save energy

More and more people realize we need to save energy. Firstly because our fossil energy sources are decreasing. The estimated years of production for oil, gas and coal are 45, 65 and 200 years respectively [1,2]. Secondly we need to save energy because of the climate change. Our daily energy use, based on fossil fuels



(gas, oil, coal), causes severe damage to the environment. To restrict the climate change a large number of countries have made agreements on CO₂ reduction [3]. The EU has the ambition to reduce CO₂-emissions by 20% in 2020 compared to 1990 [4].

All sectors of industry need to take appropriate action to reduce the use of fossil energy. In the Netherlands, the built environment is responsible for 40% of the total energy consumption [5], which makes exploration of the possibilities to reduce energy in the built environment relevant.

1.2 Energy saving potential in existing houses

The largest energy savings are feasible in the existing building stock. A house built before 1945 uses almost twice as much energy for heating in comparison to a house built after 2006 [8,9]. Housing associations own a large number of houses and renovate large scale projects, accelerating energy reduction in the existing building stock. They have a positive attitude towards energy saving techniques but name a lack of knowledge as an important barrier for applying them [5]. When renovating a whole street or neighbourhood at once, the amount of energy saving solutions is larger compared to consideration of just one building. District energy supply systems become an interesting alternative. A comparison between individual and district energy supply systems in the field of energy saving and cost-effectiveness, can support the housing associations in choosing the optimal system.

1.3 Objective

The objective is to develop a district evaluation model based on energy performance, costs and comfort to support housing associations in choosing the optimal renovation solution. Figure 1 shows a schematization of the evaluation model.

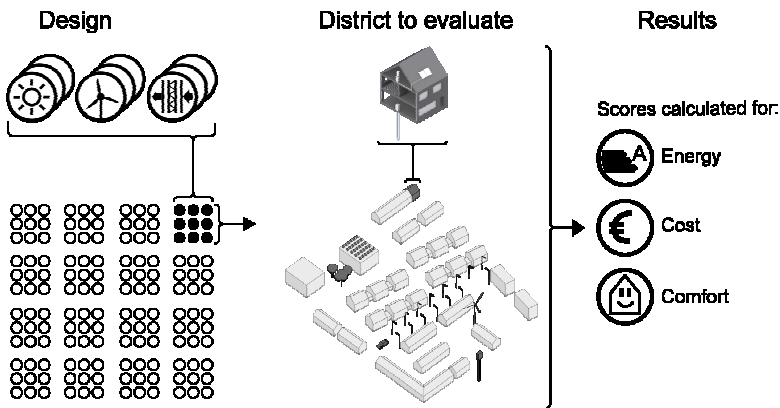


Figure 1: Schematization district evaluation model.

On the left, single renovation solutions, like solar energy and insulation, are arranged in a solution package. These packages are applied to the district in need of renovation. Next, the evaluation model will return scores for energy performance, costs and comfort. Comparison of these three results among the renovation packages is difficult. After all, which renovation solution is better the one with a good energy performance, high costs and moderate comfort or the one with a moderate energy performance, low costs and high comfort? To return the user a top ten of renovation solutions, an optimization technique will be used.

1.4 Deliverables

The following methods and techniques will be used or developed and eventually implemented in a prototype evaluation model:

1. Energy and comfort performance calculation at district level, based on existing methods at building level like EPN [8], EPA [7].
2. District data model based on existing methods like IFC [13], HDH [14].
3. Residents' preferences measurement method for the determination of the preferred design solution, based on existing methods like semantic differentials, conjoint analysis.
4. Optimization technique for the determination of the optimal design solution.

In this paper the development of an energy performance calculation method at district level will be discussed.

2 District energy performance calculation

In a house the energy needed for heating is calculated through the total heat loss minus the heat gain divided by the efficiency of the heating system. Based on the usable area of the house and system efficiency, the energy needed for hot water, ventilation and lighting are determined. At district level other aspects become part of the energy performance calculation these are discussed in the next paragraphs.

2.1 Average district energy consumption

To determine the aspects to take into account in the energy performance calculation at district level, the average energy consumption and CO₂-emissions of aspects like houses, streetlights, and transport are used. Table 1 shows houses have the largest contribution to the energy consumption in a district. The value shown in table 1 is the average energy use of the Dutch housing stock and considers energy needed for heating, hot water and appliances [9].

The amount of CO₂-emissions produced by transportation strongly depends on the type of transport and the travelling distance. The CO₂-emissions produced by transport [10], shown in table 1, are based on an average household consisting of 2,3 persons. Transport by car, assuming an average travelling distance of 15.500 km per year, has the second largest contribution to the CO₂-emissions in

Table 1: Average energy consumption and CO₂-emissions in the Netherlands per year.

Aspect	Object	Consumption	CO ₂ -emissions (ton)	Year
House	Electricity	3346 kWh	1,9	2004
	Gas	1736 m ³	3,1	2004
Transport	Car	15.500 km	3,0	2008
	Public transport - Train - Bus, tram, metro	894 km 409 km	0,2	2008
	Airplane	1300 km	0,8	2008
Streetlights	Electricity	150 kW	0,085	2001

a district. The amount of electricity needed for streetlights, given per house [11], is very small compared to the contribution of the houses and transportation and could therefore be left out of the district energy performance calculation.

2.2 Aspects to take into account

The previous paragraph concluded that the aspects house and transport have the largest contribution to the energy consumption and CO₂-emissions in a district and should therefore be part of the district energy performance calculation. The systems and building constructions in the district, households and their transport will be evaluated in the new district energy calculation method.

2.2.1 House

To compute the energy consumption for systems and building constructions in the district, existing Dutch calculation methods will be used. The first prototype of the district evaluation model will consist of the existing Dutch calculation methods EPA (Energy Performance Advice). The EPA is used in the Netherlands to compute the energy performance of a building and to create an energy label, which is required when selling or renting certain house-, commercial or industrial buildings in the Netherlands.

2.2.2 Household

Because existing energy performance calculation methods consider mainly an average household with a certain user behaviour, the actual and calculated energy consumption can differ. The user behaviour has a large influence on the eventual energy consumption. Research shows differences in energy consumption between households living in the same houses [12]. Therefore the household is included in the new district energy performance calculation.

2.2.3 Transport

To predict the type of transport and transportation distance a Dutch simulation model will be used. This model is capable of predicting the transport activities

for a household. In the next section we describe which models are used and how they are integrated into one district model.

2.3 Screening analysis EPA

The EPA calculation method needs 99 input values to compute among others the energy index, which describes a score for energy performance (smaller = better). A screening analysis is performed to find the most critical factors at building level. The screening technique evaluates a single input value. For each single input a minimum and maximum value is used to compute the influence on the energy index, total energy use and CO₂-emissions.

Some of the single input values are related to others, like the usable floor area and the façade area, which makes a single input evaluation not useful. To research the influence of these input values on the output, data of reference houses is being used [6]. This data describes average Dutch houses divided into building type and building period. The dependent input values receive fixed values from the reference houses while the independent input values are varied.

Table 2 shows per input variable the type (independent or dependent), minimum and maximum value. The total amount of variables shown in this table is lower than the amount mentioned earlier because for the first screening analysis the district systems are not evaluated and the input values concerning the front, back, left and right façade are combined in the table. For each dependent variable, the variables it depends upon are noted between brackets in the second column. Some input values have both dependent and independent characters.

3 Results screening analysis

In total nine different reference houses, consisting of five building types and four building periods for a row house, are used in the screening analysis. For each reference house the independent single input influence on the output is computed, the results are discussed in 3.1. The influence of the dependent variables is determined through comparison of reference houses with various building periods for a row house and various building types. These results are discussed in paragraph 3.2 and 3.3.

3.1 Single input influence

The energy index, total energy use and CO₂-emissions are computed per single input variable for the reference, minimum and maximum value. In case of a large difference between the output results caused by the minimum and maximum input value, the influence on the output is large. The most important input values are related to thermal insulation, residents' behaviour and building systems. In the following paragraphs the results of the input variables concerning thermal insulation, residents and building systems will be discussed in more detail.



Table 2: Variables in EPA calculation.

	Variable	Type	Minimum	Maximum
1.	Average inside temperature	I	10 °C	20 °C
2.	Ventilation correction factor	I	0,5	1,5
3.	Internal heat production	I	1,0 W/m ²	15 W/m ²
4.	Amount of residents	I	1 person	10 persons
5.	Usable area (8,13,17,20,23)	D	n/a	n/a
6.	House type (5,8,13,17,20,23)	D	n/a	n/a
7.	Roof type (6)	I	n/a	n/a
8.	Façade, opaque area (5,6)	D	1 m ²	total – 1 m ²
10.	Façade, opaque insulation	I	0,1 m ² K/W	8,0 m ² K/W
11.	Façade, boundary condition	I	outside	other room
12.	Façade, orientation	I	North	South
13.	Façade, transparent area (5,6)	D	1 m ²	total – 1 m ²
14.	Façade, transparent insulation	I	6,0 W/m ² K	1,0 W/m ² K
15.	Façade, sun access factor	I	0,3	0,8
16.	Glass, boundary condition	I	outside	other room
17.	Floor, area (5,6)	D	n/a	n/a
18.	Floor, thermal insulation	I	0,1 m ² K/W	8,0 m ² K/W
19.	Floor, boundary condition	I	ground	outside
20.	Roof, opaque area (5,6)	D	n/a	n/a
21.	Roof, opaque insulation	I	0,1 m ² K/W	10 m ² K/W
22.	Roof, transparent orientation	I	North	South
23.	Roof, transparent area (5,6)	D	n/a	n/a
24.	Roof, transparent insulation	I	6,0 W/m ² K	1,0 W/m ² K
25.	Roof, sun access factor	I	0,3	0,8
26.	Airtightness	I	filled	un filled
27.	Heating system, type	I	local	heatpump
28.	Electronic ignition (27)	I/D	yes	no
29.	Inside building envelope	I	yes	no
30.	Supply temperature (27)	I/D	< 35 °C	> 55 °C
31.	Optimal control	I	yes	no
32.	Pipes in unheated rooms	I	yes	no
33.	Insulated pipes (32)	D	yes	no
34.	Hot water system, type	I	efficient	electric boiler
35.	Hot water system, location	I	nearby	far away
36.	Kitchen boiler	I	yes	no
37.	Dishwasher	I	yes	no
38.	Shower	I	yes	no
39.	Water-saving showerhead	I	yes	no
40.	Bath	I	yes	no
41.	Ventilation system	I	natural	mechanic
42.	Heat recovery efficiency (41)	I/D	60%	95%
43.	Fan type (41)	I/D	DC	AC

Table 2: Continued.

	Variable	Type	Minimum	Maximum
44.	Solar boiler, type	I	none	combination
45.	Contribution heating system	I	yes	no
46.	Contribution hot water system	I	yes	no
47.	Solar boiler, area (44, 45, 46)	D	0 m ²	5,5 m ²
48.	Solar boiler, orientation	I	North	South
49.	Solar boiler, angle	I	90 °	45 °
50.	Solar panel, type	I	amorphous	crystalline
51.	Solar panel, area	I	0 m ²	10 m ²
52.	Solar panel, orientation	I	North	South
53.	Solar panel, angle	I	90 °	30 °

3.1.1 Residents' behaviour variables

The average inside temperature has the largest influence on the output, based on the chosen minimum and maximum value in table 2. The minimum value is chosen very low, in practice this value will be more close to 16 °C. In that case the amount of influence on the output is similar to the other input variables concerning residents' behaviour. An increasing average inside temperature, amount of residents and ventilation correction factor gives a higher energy performance. The opposite applies to the internal heat production. This was to be expected, because a higher internal heat production lowers the heat demand and therefore the energy use.

3.1.2 Building construction variables

The influence of the percentage of glass in the façade depends on the orientation. Increase of the glass area on the north decreases the energy index with 0,04, while on the south the energy index increases with 0,25 when the glass area is increased with the same amount. The influence of the thermal insulation of the roof has the largest influence followed by the façade, floor and finally glass insulation. It looks like the area of the construction is important for the result. The results for the maximum thermal insulation are situated close to each other.

3.1.3 Building system variables

Independent input variables concerning building systems are among others a heating, hot water and ventilation system. The maximum value represents a system with high energy efficiency and has therefore better results for the energy performance. The efficiency of the heating system has the largest influence on the output.

3.2 Housing type influence

The comparison of five different reference houses, consisting of a row house, detached house, semi-detached house, maisonette and apartment, shows the influence of dependent input values. The main differences between the five building types are the usable floor area, amount of residents, building envelope area and percentage of glass in the façades. To exclude differences caused by

insulation, the five reference houses are all from the same building period (< 1966). Table 3 shows the results for the energy index, total energy use and CO₂-emissions. Because of the large differences between the five building types, it can be stated that the dependent input values influence the output.

Besides differences between the building types caused by the dependent variables, the independent variables appear to have different influence on the

Table 3: Results of five building types.

Building type	Energy index (-)	Total energy use (MJ)	CO ₂ -emissions (kg)
Apartment	1,71	41300	2172
Maisonette	1,60	55705	2893
Row house	1,68	65266	3382
Semi-detached	2,10	108115	5560
Detached	1,98	190925	9831

output. Some of them have equal results for each building type, this applies to the thermal insulation of the roof. Others show an increasing influence on the output in case of a bigger house, like the average inside temperature and the heating system. But most of the input values show an increasing influence when the house is enlarged.

3.3 Building period influence

The comparison of four different reference row houses, built before 1946, between 1946-1965, 1976-1979 and 1989-2000, shows the influence of dependent input values. The main differences between the building periods are the thermal insulation and the presence of a bath. To exclude the differences caused by the size of the houses, the building type is kept the same. Table 4 shows the results for the energy index, total energy use and CO₂-emissions. Because of the differences between the four building periods, it can be stated that the dependent input values influence the output. Paragraph 3.1.2 already mentioned the influence of the thermal insulation on the output.

Table 4: Results for four building periods.

Building period	Energy index (-)	Total energy use (MJ)	CO ₂ -emissions (kg)
< 1946	1,72	69199	3582
1946 - 1965	1,68	65266	3382
1976 - 1979	1,42	59779	3112
1989 - 2000	1,20	49261	2610

Besides differences between the building periods caused by the dependent variables, the independent input values appear to have different influence on the output. Most of them have equal results for each building period. The average inside temperature, floor boundary conditions and heating system show a decreasing influence on the output when the building period is younger.



4 Conclusion

4.1 Independent input

Nine different reference houses, consisting of five building types and four building periods for a row house, are used in the screening analysis. Table 5 shows the most important independent variables in the EPA calculation.

Table 5: Most important (independent) input variables EPA calculation.

	Input	Energy index	Total energy use	CO ₂ -emissions
1	Roof, opaque insulation	0,981	0,980	0,953
2	Average inside temperature	0,885	0,885	0,862
3	Façade, opaque insulation	0,578	0,578	0,560
4	Internal heat production	0,445	0,473	0,459
5	Ind. heating system, type	0,448	0,448	0,547
6	Ventilation correction factor	0,314	0,315	0,306
7	Floor, boundary condition	0,269	0,405	0,303
8	Amount of residents	0,227	0,239	0,233
9	Façade, transparent insulation	0,167	0,167	0,162
10	Façade, transparent area	0,145	0,146	0,141
11	Ventilation system	0,131	0,131	0,136
12	Hot water system, type	0,128	0,130	0,138

For each independent variable, the minimum and maximum value for the energy index, total energy use and CO₂-emissions is determined to find the most important independent variables. The difference is divided by the reference value to compare the results among the independent variables. Eqn 1 gives an example of the variable ‘thermal insulation of the roof’ for the reference row house built before 1946.

$$\frac{|EI_{\min} - EI_{\max}|}{EI_{ref}} = \frac{|3,21 - 1,58|}{1,72} = 0,95 \quad (1)$$

Explanation components stated within eqn (1):

EI_{\min} = energy index in case of the minimum input value;

EI_{\max} = energy index in case of the maximum input value;

EI_{mref} = energy index in case of the reference input value.

Because the influence of the independent variables differs per building type and building period, the average score for the nine reference houses is shown in table 5. The higher the score, the larger the influence of the variable on the output.

4.2 Dependent input

Data of reference houses are used to vary the dependent variables useable floor area, building envelope area and house type. The screening results discussed in paragraph 3.2 and 3.3 show the dependent variables influence the output. These results only show the size of influence on the output of a group of dependent variables. At this stage it is not possible to determine the single influence of each dependent variable. Therefore, future work will consist of a sensitivity analysis that considers multiple variables.

References

- [1] Ministerie van Economische Zaken, *Derde Energielnota*, SDU Uitgevers, Den Haag, 1995.
- [2] World Energy Council, *Survey of energy resources*, Elsevier, Oxford, 2004.
- [3] Alley, R., Berntsen, T., Bindoff, N., Chen, Z., Chidthaisong, A., Friedlingstein, P., et al., *Climate Change 2007: the physical science basis*, The IPCC 4th assessment report, 2007.
- [4] Wesselink, L.G., Eerens, H. & Vis, J., *EU 2020 climate target: 20% reduction requires five-fold increase in impact of CO₂ policies*, Netherlands Environmental Assessment Agency (MNP), Bilthoven, 2008.
- [5] Sunikka, M.M., *Policies for improving energy efficiency in the European housing stock*, IOS Press BV, Amsterdam, 2006.
- [6] SenterNovem, *Voorbeeldwoningen bestaande bouw 2007*, SenterNovem, Sittard, 2007.
- [7] DGMR, *Formulestructuur EI en maatwerkadvies woningbouw*, SenterNovem, Sittard, 2006.
- [8] NEN 5128:2004, *Energy performance of residential functions and residential buildings – Determination method*, 2004.
- [9] SenterNovem, *Cijfers en tabellen 2007*, SenterNovem, Sittard, 2007.
- [10] Dutch independent corporation 'milieu centraal' offering environmental information, www.milieucentraal.nl/
- [11] Rooijers, F., Moorman, S., Dulk den, F. & Buitenhuis, H., *EPL bestaande woningbouw; systematiek*, CE, Delft, 2001.
- [12] Soethout, L.L., Peitsman, H.C., Shemeikka, J., Haakana, M., Soitinaho, U. and Tessier, Ph., *Improving municipal energy management by motivational measures and knowledge transfer*, TNO, Delft, 1999.
- [13] International Alliance for Interoperability, information on building model IFC, www.iai-international.org
- [14] Dutch webpage 'Het digitale huis' on building model, www.hetdigitalehuis.nl